

TSOL-DCU1000/P1000/B1000



Plug and play



Stackable up to
5kWh battery



WiFi monitoring



Flexible for home or
portable usage



Zero export

FOR



DC Coupled Unit


Household electricity

TSUNESS Co., Ltd

sales@tsun-ess.com www.tsun-ess.com +86-512-66186028

DC Coupled Unit

Fits right between PV panel and microinverter, offers storage option for existing balcony PV systems.

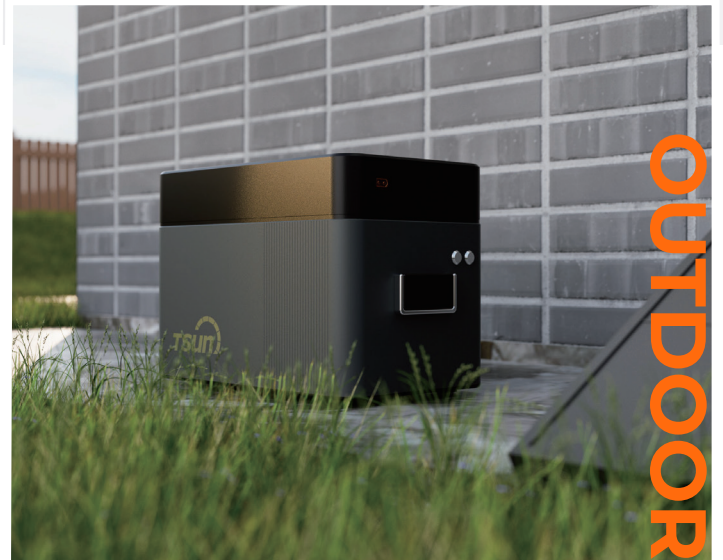

DCU1000

DC Coupled Unit 1.024Kwh
Input 1200W DC Output 800W

P1000

Portable Station Accessory
Input 600W AC Output 1000W

B1000

Battery Pack 1.024kwh

B1000

Battery Pack 1.024kwh

Key Features



Maximize PV generation into local consumption



1-5kWh expansion capacity



Zero export



Plug and play design for DIY, no need for professional Installer




WiFi monitoring, accessible via TSUN Smart app



Compatible with 99% of microinverters brands in the market

6 Unique Design

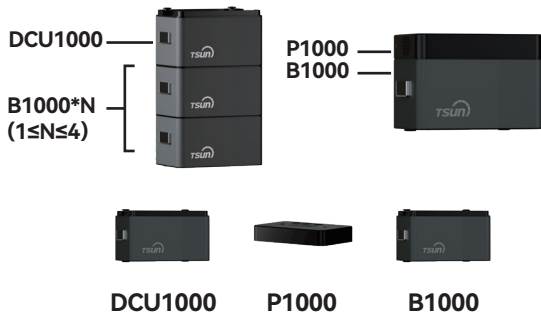


Modular Stackable Design:

Flexible modular design allows the system to expand according to household needs, providing a convenient and quick solution.


Indoors
Balcony Solar Storage System

Outdoors
Portable Power Station




Versatile Application Combinations:

Suitable for various scenarios, including home, outdoor, and emergency situations, meeting diverse electricity demands.

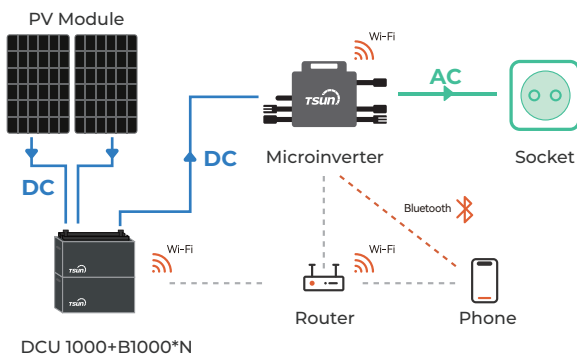


Smart Control:

Integrates 2.4G WiFi wireless communication technology for intelligent control through a mobile app, enabling remote monitoring and operation. Module stacking allows for automatic networking, ensuring simplicity and ease of use.

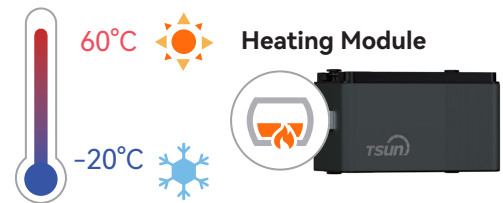

Wide Temperature Range Adaptability:
Built-in battery heating module enables stable operation in extreme temperatures ranging from -20°C to 60°C.



Long-life Battery:

Utilizes safety power batteries, offering 6000 times cycle life and high safety performance, ensuring stable system operation and user safety.



IP65 Certification


It possesses an IP65 certification, allowing it to withstand diverse weather conditions and special circumstances.

Indoors——Balcony Solar Storage Solution

The DCU1000 is a crucial component of the balcony solar storage system: The Smart Lithium Battery Pack, when combined with solar photovoltaic panels and microinverters, forms the balcony solar storage system. **One DCU1000 can connect four B1000.**

Designed with modularity in mind and can be paralleled with up to 5 units at most, helping households make the most of limited space, achieve energy self-sufficiency, and reduce electricity costs by 1/3.

System Diagram——DCU 1000+B1000

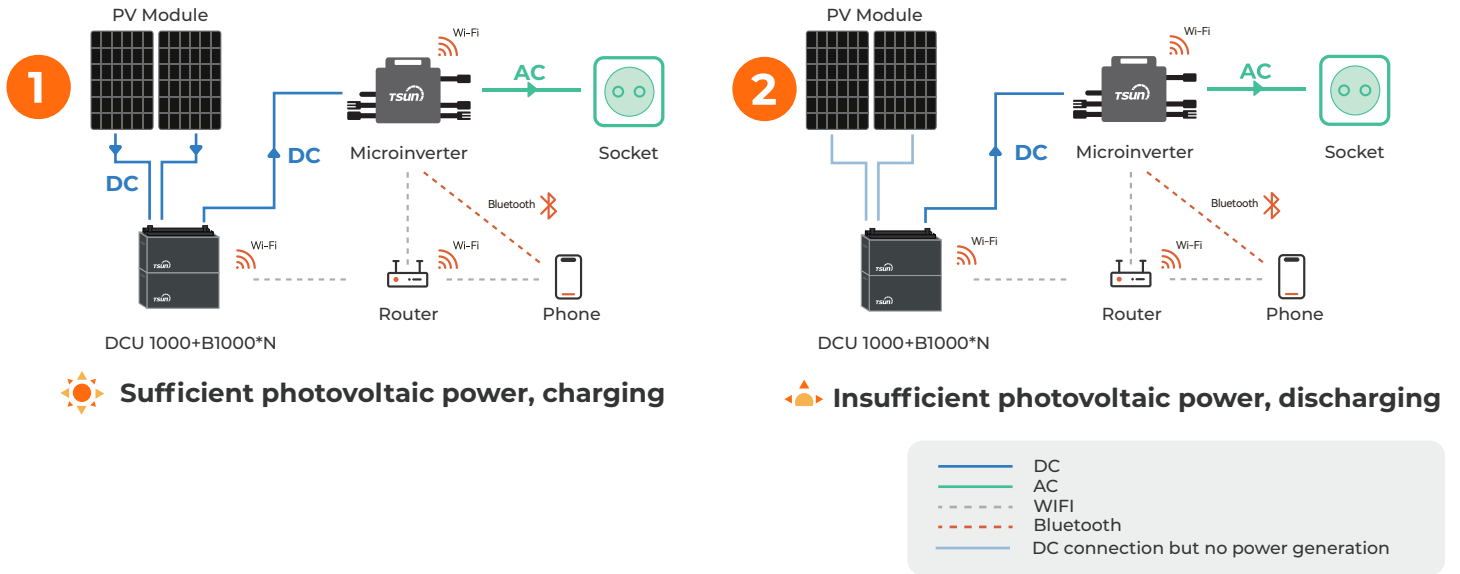


Outdoors——Portable Power Station

B1000 Battery flexibly combine with P1000 inverter module to form a portable power station, making it the ideal companion for camping and other outdoor activities. **One P1000 can connect one B1000.**



System Diagram——P1000+B1000

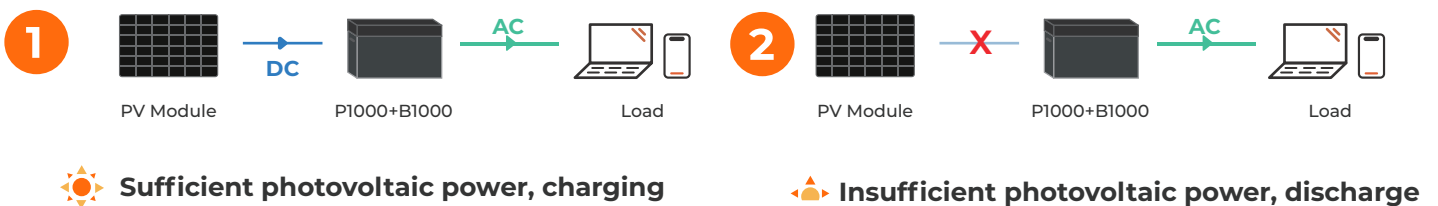

Technical Data

Model	DCU1000
Mainframe(Single Pack)	
Capacity	1024 Wh
Size(L*W*H)	12.99*8.27*7.68(in)/ 330*210*195(mm)
Weight	24.25lbs/ 11kg
Battery Type	LiFePO4
Cycle Life	6000 Cycles, Remaining Capacity ≥ 70%
Input Voltage	18-55Vdc
Input Current Max	15A
Maximum Input Power	1200W
Maximum Output Power	800W
Output Voltage Range	20-50Vdc
Maximum System Capacity	5120Wh
Protection Level	IP65
Operating Temperature	-20°C-60°C (Smart Battery Heating Module)
Protection	
Overcharge	Support
Overdischarge	Support
Overcurrent	Support
High Temperature	Support
Low Temperature	Support
Short Circuit Protection	Support
Others	
WiFi Module	Support
Balancing Mode	Support

Model	P1000
Split Type Inverter	
Size(L*W*H)	12.99*8.27*2.36(in)/ 330*210*60(mm)
Weight	5.51lbs/ 2.5kg
Input Voltage	42-58VDC (Rated 48VDC)
Noise	≤55dB
AC Output Voltage	220V~240V
Rated Output Frequency	50Hz/60Hz
Max. PV Input Power	600W
AC Output Power	1000W
Protection Functions	Under Voltage Input Protection/ Output Short Circuit Protection/ Output Overload Protection/ High Temperature Protection/ Low Temperature Protection
Pallet	96 Units/ Pallet

Model	B1000
Battery Capacity	1024Wh
Product Dimensions	12.99*8.27*7.68(in)/ 330*210*195(mm)
Battery Type	LiFePO4
Rated Battery Voltage	48V
Voltage Range	40V~58.4V
Typical Max Current	50A
Under-voltage Alarm Point	47V±5%
Under-voltage Protection Point	40V±5%
Protection Function	63A
Battery Fuse	Short Circuit Protection, Overload Protection, Overcurrent Protection, Temperature Protection, Overvoltage and Under-voltage Protections
Reverse Polarity Protection	Open Circuit of the Internal Fuse
Operating Temperature	-20°C-60°C (Smart Battery Heating Module)
Operating Humidity	10%~90% Non-condensing
EMI Degree	CLASS B
Protection Degree	IP65
Pallet	54 Units/ Pallet

MORE SAFETY MORE POWER

TSUNESS Headquarter

🌐 www.tsun-ess.com

☎ +86 512 6618 6028

✉ sales@tsun-ess.com

📍 2nd Floor, Building 2, No. 55 Aigehao Road, Weitang Town, Xiangcheng District, Suzhou City, Jiangsu Province, China

TSUNESS Europe GmbH

🌐 de.tsun-ess.com

✉ sales@tsun-ess.com / service_DE@tsun-ess.com

📍 Friedrich-Ebert-Anlage 36, 60325 Frankfurt am Main, Germany

