



PERC | TECHNOLOGY
INSIDE

550 W 21.28 %

Maximum power

Maximum efficiency


KEY BENEFITS AND FEATURES



Power from **540 to 550 Watt**



144 M10 PERC half-cut cells



Silver frame and white backsheet



Ideal for **Commercial** and
Industrial installations



Long cable as standard suitable
for landscape configurations



2279 x 1134 x 35 mm

Performance guarantee


- **25-years** performance warranty with max power decrease from 2nd year **0.5%/year**
- **97%** at the end of first year
- **90%** at the end of 20th year
- **87%** at the end of 25th year

Product guarantees

- **15-year** product warranty
- Third-party product **liability** insurance
- All FuturaSun's modules are designed and guaranteed by the **Italian** headquarters

Mechanical Specifications

Dimensions	2279 x 1134 x 35 mm
Weight	28.2 kg
Glass	High transmission, Low iron, Tempered, ARC, Thickness 3.2 mm
Cells	144 monocrystalline half-cut MBB PERC cells 182 x 91 mm
Frame	Anodized aluminium frame with mounting and drainage holes
Junction boxes	Certified according to IEC 62790, IP 68 approved, 3 bypass diodes
Cables	Solar cable, length 1400 mm or customized assembled with 4mm ² compatible connectors
Backsheet	Composite Multilayer film - white
Maximum reverse current (I _r)	25 A
Maximum system voltage	1000 V (1500 V on request)
Mechanical load (snow)	Design load: 3600 Pa, (5400 Pa including safety factor 1.5)
Mechanical load (wind)	Design load: 1600 Pa, (2400 Pa including safety factor 1.5)

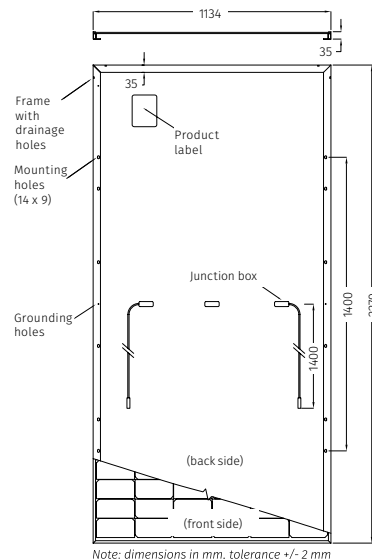

Electrical data - STC*

		FU 540 M	FU 545 M	FU 550 M
Sorting tolerance	%		0/+5	
Module power (P _{max})	W	540	545	550
Open circuit voltage (V _{oc})	V	49.66	49.81	49.96
Short circuit current (I _{sc})	A	13.77	13.84	13.91
Maximum power voltage (V _{mpp})	V	41.8	41.96	42.12
Maximum power current (I _{mpp})	A	12.92	12.99	13.06
Module efficiency	%	20.89	21.09	21.28

Electrical data - NOCT**

		FU 540 M	FU 545 M	FU 550 M
Module power (P _{max})	W	407	411	415
Open circuit voltage (V _{oc})	V	46.53	46.65	46.78
Short circuit current (I _{sc})	A	11.05	11.09	11.13
Maximum power voltage (V _{mpp})	V	39.03	39.26	39.49
Maximum power current (I _{mpp})	A	10.43	10.47	10.51

Temperature ratings

Temperature coefficient I _{sc}	%/°C	0.05
Temperature coefficient V _{oc}	%/°C	-0.27
Temperature coefficient P _{max}	%/°C	-0.35
NOCT**	°C	45
Operating temperature	°C	from -40 to +85

Certifications

Factory	ISO 9001 - 14001 - 45001
Product	IEC EN 61215 - IEC EN 61730 Class 1 UNI9177, IEC EN 61701, IEC EN 62716, MCS

Packaging

Quantity / Pallet	31 pcs
Container 40' HC	620 pcs / 20 pallets

The information included in this module datasheet is subject to change without notice and is provided for informational purposes only. No contractual rights are established or should be inferred because of user's reliance on the information contained in this module datasheet. Please refer to the appropriate module user guide and module product specification document for more detailed technical information regarding module performance, installation and use.

*Standard Test Conditions STC: 1000 W/m² - AM 1.5 - 25 °C - tolerance: P_{max} (±3%), V_{oc} (±4%), I_{sc} (±5%)
 **Nominal Operating Cell Temperature NOCT: 800 W/m² - T=45 °C - AM 1.5

EN_04